

E-mail: [sales@aquatreaduwt.com](mailto:sales@aquatreaduwt.com)  
 South Africa : +27 79 718 54 99  
 Australia : +61 48 771 18 84  
 USA : +1 305 879 2516



## Canine Underwater Treadmills

**K9-1900 ECO:** The smallest canine economy model with a 1600mm belt to fit smaller spaces.

**K9-2300 ECO:** The economy model with a longer 2m belt length to include the rehabilitation and exercise of giant breeds.

**K9-2300 PRO:** The pro-model with the 2m belt length, jets and massage attachment. It comes with extra features for optimal usage and therapist comfort.

- isolation plate
- therapist bench
- remote control
- sliding harness hooks



All models have a two-door, walk-through design.

Our underwater treadmills are designed to be practical to use and easy to maintain with local trade assistance.

Features	K9-1900 ECO	K9-2300 ECO	K9-2300 PRO
Belt length	1.6m	2m	2m
Adjustable belt speed up to 10km/h	✓	✓	✓
Motorised incline	✓	✓	✓
Large water storage tank	✓	✓	✓
Filtration and sanitizing system	✓	✓	✓
Jets			✓
Massage attachment			✓
Remote control			✓
Sliding hooks for securing harnesses			✓
Therapist Bench			✓
Isolation platform			✓
Tray and basket	✓	✓	✓
Working Platforms (Inside tank and outside)	✓	✓	✓
LCD touch screen display	✓	✓	✓
Assistance with layout and design	✓	✓	✓
Custom installation	✓	✓	✓

## Site Requirements

### Space:



- Consultation for most appropriate configuration of space available.
- Dogs require walking access to straight ramps.
- Corner ramps can be supplied at additional cost for tight spaces to make access safer and more acceptable to patients.
- Drain in floor recommended.
- Floor load bearing capacity must be adequate. A full treadmill can weigh 2000kg.

### Access:

- The system is delivered to the site crated to be unpacked and installed by our technical personnel.
- No heavy equipment is required for installation.
- The machine can fit through most single doorways although double doorways are preferred.

### Electrical:

- 220/240V (or 380/400V)
- Dedicated circuit breaker of min 32A in site DB.
- Power supply to our DB, positioned at the machine, should be installed by your electrician (3 core x 4mm cable minimum, depending on distance of power supply from machine).
- As a safety feature, the system has its own earth leakage protection installed and cannot be connected to your existing earth leakage protector. Your electrician will install a separate isolator depending on municipal/council requirements.

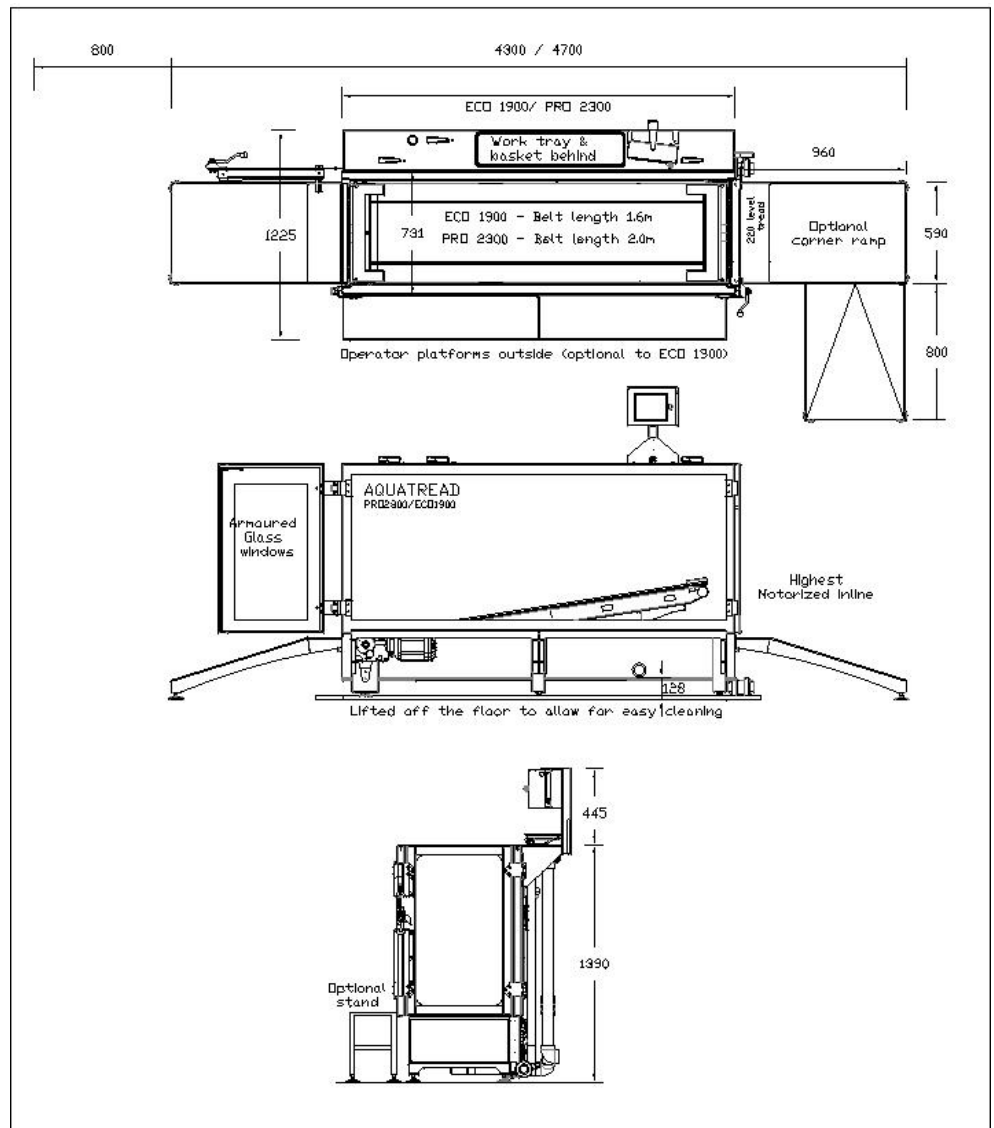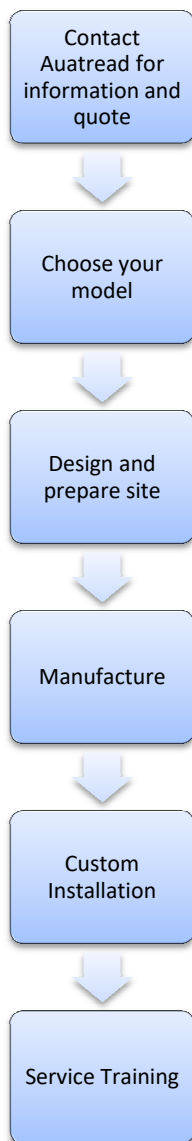

E-mail: [sales@aquatreaduwt.com](mailto:sales@aquatreaduwt.com)  
 South Africa : +27 79 718 54 99  
 Australia : +61 48 771 18 84  
 USA : +1 305 879 2516