E-mail: sales@aquatreaduwt.com South Africa: +27 79 718 54 99 Australia: +61 48 771 18 84 USA: +1 305 879 2516




Equine Underwater Treadmills

EQ3800T: Standard equine model with warm water system and massage attachment.

EQ3800TC: Chiller-option includes two water systems.

- Belt length 3400mm
- Adjustable speed up to 10km/hr
- Motorised incline
- Emergency stop
- Working platforms
- Large water storage tank
- Filtration and sanitizing system
- LCD touch screen display
- Assistance with layout and design
- Custom installation

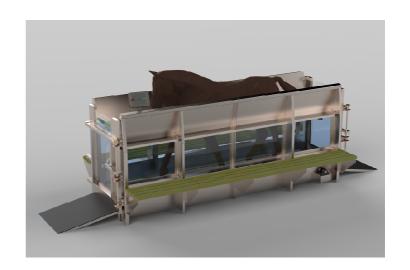

Contact Aquatread for Information and auote Choose your model 3800 6400 Design and prepare site Manufacture Custom Installation 2590 Service Training 6400

Site Requirements

Space:

- Consultation for most appropriate configuration of space available.
- Drain in floor recommended.
- Floor load bearing capacity must be adequate. A full treadmill can weigh 6000kg.

Access:

- Space required 6.7 x 3m
- Minimum door opening of 1500mm required.

Electrical:

- Three-phase required (380/400V)
- Dedicated circuit breaker of min 50A in site DB.
- Power supply to our DB, positioned at the machine, should be installed by your electrician (4 core x 6mm cable minimum, depending on distance of power supply from the machine).
- As a safety feature, the system has its own earth leakage protection installed and cannot be connected to your existing earth leakage protector. Your electrician will install a separate isolator depending on



E-mail: sales@aquatreaduwt.com South Africa : +27 79 718 54 99 Australia : +61 48 771 18 84 USA : +1 305 879 2516